

LINEARlight FLEX Diffuse Top

LED modules for professional and industrial applications Notice: New Generation or successor products available!



Product family features

- Diffused light lines without visible spots
- Flexible and cuttable module to support design freedom
- Long operational length per single power feed up to 10 m
- Ideal for luminaire designs
- Extra strong self-adhesive backside for easy mounting
- 24 V technology for easy dimensioning
- Recommended in system use with OPTOTRONIC
- Increased reliability due to single piece reel-to-reel technology
- Dimmable with PWM technology

Product family benefits

- IP66/IP68 protection with high performance silicone
- Reliable connection over long periods of time: IP66/67 connector with built-in protection against liquids penetrating through the wires into the LED strip
- Outdoor use possible: UV and salt mist resistant (UV acc. to ISO 4892-2 - Method A, salt mist acc. to IEC 60068-2-52 severity 1)

Areas of application

- Individual and customized luminaires
- Organic shaped luminaires
- Architectural Integration – e.g. coves, walls
- Object integration – e.g. handrails
- Signage and illuminated advertising



Product family datasheet

Technical data

Product description	Electrical data	Photometrical data	Dimensions & weight			
	Nominal wattage per meter	Standard deviation of color matching	Height	Width	Length	Product weight
LFD400T -G2-824-10	7.3 W	≤3 sdc	10.8 mm	14.1 mm	10000 mm	1900.00 g
LFD400T -G2-827-10	7.3 W	≤3 sdc	10.8 mm	14.1 mm	10000 mm	1900.00 g
LFD400T -G2-830-10	7.3 W	≤3 sdc	10.8 mm	14.1 mm	10000 mm	1900.00 g
LFD400T -G2-840-10	7.3 W	≤3 sdc	10.8 mm	14.1 mm	10000 mm	1900.00 g
LFD400T -G2-924-10	7.3 W	≤3 sdc	10.8 mm	14.1 mm	10000 mm	1900.00 g
LFD400T -G2-927-10	7.3 W	≤3 sdc	10.8 mm	14.1 mm	10000 mm	1900.00 g
LFD400T -G2-930-10	7.3 W	≤3 sdc	10.8 mm	14.1 mm	10000 mm	1900.00 g
LFD400T -G2-940-10	7.3 W	≤3 sdc	10.8 mm	14.1 mm	10000 mm	1900.00 g
LFD800T -G2-824-06	13.5 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G2-827-06	13.5 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G2-830-06	13.5 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G2-840-06	13.5 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G2-924-06	13.5 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G2-927-06	13.5 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G2-930-06	13.5 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G2-940-06	13.5 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD1300T -G2-824-04	21 W	≤3 sdc	10.8 mm	14.1 mm	4000 mm	695.00 g
LFD1300T -G2-827-04	21 W	≤3 sdc	10.8 mm	14.1 mm	4000 mm	695.00 g
LFD1300T -G2-830-04	21 W	≤3 sdc	10.8 mm	14.1 mm	4000 mm	695.00 g
LFD1300T -G2-840-04	21 W	≤3 sdc	10.8 mm	14.1 mm	4000 mm	695.00 g
LFD1300T -G2-927-04	21 W	≤3 sdc	10.8 mm	14.1 mm	4000 mm	695.00 g
LFD1300T -G2-930-04	21 W	≤3 sdc	10.8 mm	14.1 mm	4000 mm	695.00 g
LFD1300T -G2-940-04	21 W	≤3 sdc	10.8 mm	14.1 mm	4000 mm	695.00 g
LFD400T G1-824-06	7.2 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400T -G1-827-06	7.2 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400T -G1-830-06	7.2 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400T -G1-835-06	7.2 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400T -G1-840-06	7.2 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400T -G1-850-06	7.2 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400T -G1-865-06	7.2 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T G1-824-06	11.5 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G1-827-06	11.5 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G1-830-06	11.5 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G1-835-06	11.5 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G1-840-06	11.5 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G1-850-06	11.5 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G1-865-06	11.5 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400T -G1-924-06	7.2 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400T -G1-930-06	7.2 W	≤3 sdc	10.8 mm	14.1 mm	6000 mm	1040.00 g

Product family datasheet

Product description	Electrical data	Photometrical data	Dimensions & weight			
	Nominal wattage per meter	Standard deviation of color matching	Height	Width	Length	Product weight
LFD400T -G1-935-06	7.2 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400T -G1-940-06	7.2 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400T -G1-965-06	7.2 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G1-924-06	11.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G1-930-06	11.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G1-935-06	11.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G1-940-06	11.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD800T -G1-965-06	11.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g

Product description	Logistical data	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
	Commodity code	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
LFD400T -G2-824-10	853951000000	24-01-2023	4062172273756	Lead
LFD400T -G2-827-10	853951000000	24-01-2023	4062172273770	Lead
LFD400T -G2-830-10	853951000000	24-01-2023	4062172273794	Lead
LFD400T -G2-840-10	853951000000	24-01-2023	4062172273831	Lead
LFD400T -G2-924-10	853951000000	24-01-2023	4062172273879	Lead
LFD400T -G2-927-10	853951000000	24-01-2023	4062172273893	Lead
LFD400T -G2-930-10	853951000000	24-01-2023	4062172273916	Lead
LFD400T -G2-940-10	853951000000	24-01-2023	4062172273954	Lead
LFD800T -G2-824-06	853951000000	24-01-2023	4062172270373	Lead
LFD800T -G2-827-06	853951000000	24-01-2023	4062172270397	Lead
LFD800T -G2-830-06	853951000000	24-01-2023	4062172270410	Lead
LFD800T -G2-840-06	853951000000	24-01-2023	4062172270458	Lead
LFD800T -G2-924-06	853951000000	24-01-2023	4062172270496	Lead
LFD800T -G2-927-06	853951000000	24-01-2023	4062172270519	Lead
LFD800T -G2-930-06	853951000000	24-01-2023	4062172270533	Lead
LFD800T -G2-940-06	853951000000	24-01-2023	4062172270571	Lead
LFD1300T -G2-824-04	853951000000	24-01-2023	4062172270854	Lead
LFD1300T -G2-827-04	853951000000	24-01-2023	4062172270878	Lead
LFD1300T -G2-830-04	853951000000	24-01-2023	4062172270892	Lead
LFD1300T -G2-840-04	853951000000	24-01-2023	4062172270939	Lead
LFD1300T -G2-927-04	853951000000	24-01-2023	4062172270991	Lead
LFD1300T -G2-930-04	853951000000	24-01-2023	4062172271011	Lead
LFD1300T -G2-940-04	853951000000	21-04-2023	4062172271059	Lead
LFD400T G1-824-06	853951000000	08-02-2023	4052899581647	Lead
LFD400T -G1-827-06	853951000000	08-02-2023	4052899581661	Lead
LFD400T -G1-830-06	853951000000	08-02-2023	4052899581685	Lead
LFD400T -G1-835-06	853951000000	08-02-2023	4062172001038	Lead
LFD400T -G1-840-06	853951000000	08-02-2023	4052899581708	Lead

Product family datasheet

Product description	Logistical data	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
	Commodity code	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
LFD400T -G1-850-06	853951000000	08-02-2023	4062172062350	Lead
LFD400T -G1-865-06	853951000000	08-02-2023	4052899581722	Lead
LFD800T -G1-824-06	853951000000	08-02-2023	4052899581883	Lead
LFD800T -G1-827-06	853951000000	08-02-2023	4052899581906	Lead
LFD800T -G1-830-06	853951000000	28-04-2023	4052899582002	Lead
LFD800T -G1-835-06	853951000000	08-02-2023	4062172001076	Lead
LFD800T -G1-840-06	853951000000	08-02-2023	4052899581920	Lead
LFD800T -G1-850-06	853951000000	08-02-2023	4062172062398	Lead
LFD800T -G1-865-06	853951000000	08-02-2023	4052899581944	Lead
LFD400T -G1-924-06	853951000000	08-02-2023	4062172025522	Lead
LFD400T -G1-930-06	853951000000	08-02-2023	4062172025546	Lead
LFD400T -G1-935-06	853951000000	08-02-2023	4062172025560	Lead
LFD400T -G1-940-06	853951000000	08-02-2023	4062172025584	Lead
LFD400T -G1-965-06	853951000000	08-02-2023	4062172025607	Lead
LFD800T -G1-924-06	853951000000	08-02-2023	4062172025720	Lead
LFD800T -G1-930-06	853951000000	08-02-2023	4062172025744	Lead
LFD800T -G1-935-06	853951000000	08-02-2023	4062172025768	Lead
LFD800T -G1-940-06	853951000000	08-02-2023	4062172025782	Lead
LFD800T -G1-965-06	853951000000	08-02-2023	4062172025805	Lead

Product description	CAS No. of substance 1	Declaration No. in SCIP database	Safe Use Instruction
LFD400T -G2-824-10	7439-92-1	In work	
LFD400T -G2-827-10	7439-92-1	In work	
LFD400T -G2-830-10	7439-92-1	In work	
LFD400T -G2-840-10	7439-92-1	In work	
LFD400T -G2-924-10	7439-92-1	In work	
LFD400T -G2-927-10	7439-92-1	In work	
LFD400T -G2-930-10	7439-92-1	In work	
LFD400T -G2-940-10	7439-92-1	In work	
LFD800T -G2-824-06	7439-92-1	In work	
LFD800T -G2-827-06	7439-92-1	In work	
LFD800T -G2-830-06	7439-92-1	In work	
LFD800T -G2-840-06	7439-92-1	In work	
LFD800T -G2-924-06	7439-92-1	In work	
LFD800T -G2-927-06	7439-92-1	In work	
LFD800T -G2-930-06	7439-92-1	In work	
LFD800T -G2-940-06	7439-92-1	In work	
LFD1300T -G2-824-04	7439-92-1	In work	
LFD1300T -G2-827-04	7439-92-1	In work	
LFD1300T -G2-830-04	7439-92-1	In work	
LFD1300T -G2-840-04	7439-92-1	In work	

Product family datasheet

Product description	CAS No. of substance 1	Declaration No. in SCIP database	Safe Use Instruction
LFD1300T -G2-927-04	7439-92-1	In work	
LFD1300T -G2-930-04	7439-92-1	In work	
LFD1300T -G2-940-04	7439-92-1	e9ce803f-78ab-4f2a-874a-9e3843c95641	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400T G1-824-06	7439-92-1	ffdcc9a9-85e2-4d41-b57b-0b1299a590fc	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400T -G1-827-06	7439-92-1	179eab20-8201-4922-9bc0-e5d89bc1a1ec	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400T -G1-830-06	7439-92-1	10c725e1-66c8-4a98-8033-4b6c6085eb50	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400T -G1-835-06	7439-92-1	64b79de5-026e-4daa-bbdd-c000215897e3	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400T -G1-840-06	7439-92-1	7bf99dfd-37f9-46ed-a81b-191b5e1e1a34	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400T -G1-850-06	7439-92-1	af0b8a06-d7ad-450f-a729-be0d43cbf9cf	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400T -G1-865-06	7439-92-1	a4e70044-2deb-4cee-b185-2f058231fdc1	The identification of the Candidate List substance is sufficient to allow safe use of the article.


Product family datasheet

Product description	CAS No. of substance 1	Declaration No. in SCIP database	Safe Use Instruction
LFD800T -G1-824-06	7439-92-1	b5033316-75c6-4561-b0d6-f7361d3e91c1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD800T -G1-827-06	7439-92-1	b5b8952a-9931-438e-bf0a-fe2feaa15983	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD800T -G1-830-06	7439-92-1	1208cabf-634e-4d13-83ca-d0a71457a560	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD800T -G1-835-06	7439-92-1	539e361e-548f-47d4-b353-2950fc3a1ed4	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD800T -G1-840-06	7439-92-1	15341be3-57e8-444d-bd37-3ca3669f2404	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD800T -G1-850-06	7439-92-1	511656ce-6096-425a-98e5-1e0ae10157e6	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD800T -G1-865-06	7439-92-1	3465981e-a95b-4e85-960e-e4cd52d215b4	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400T -G1-924-06	7439-92-1	2d669eac-c8b8-4da0-ad51-fc7f1048c311	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400T -G1-930-06	7439-92-1	ea4c80f2-e9af-4a36-a45c-e0425716ff91	The identification of the Candidate List substance is sufficient to allow safe use of the article.


Product family datasheet

Product description	CAS No. of substance 1	Declaration No. in SCIP database	Safe Use Instruction
LFD400T -G1-935-06	7439-92-1	33fac73e-d792-4e11- bcda-a0c1cd03ab06	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400T -G1-940-06	7439-92-1	46a06252-953b- 4abd-ab5a- 7fb812f970f9	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400T -G1-965-06	7439-92-1	6a74292b-9aa3- 4e80-9367- b5b932e71a29	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD800T -G1-924-06	7439-92-1	a35fae74-304c-4174- 9225-2e11da96b3bc	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD800T -G1-930-06	7439-92-1	d5800e3b-8e8e- 414c-8eee- eec8e569d524	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD800T -G1-935-06	7439-92-1	8f1462e3-37f4-4df2- 9c00-8730f0bb3533	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD800T -G1-940-06	7439-92-1	bc55e488-030e- 4c19-8264- b6dee94d953e	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD800T -G1-965-06	7439-92-1	12b05c6f-c7aa-4e5b- ab7f-cfb24e46d436	The identification of the Candidate List substance is sufficient to allow safe use of the article.

Product family datasheet

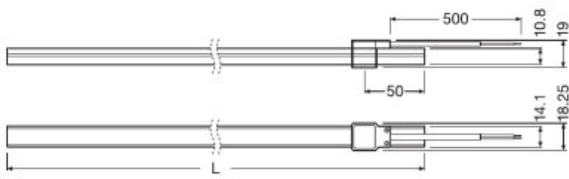

LINEARlight FLEX DIFFUSE Top line drawing

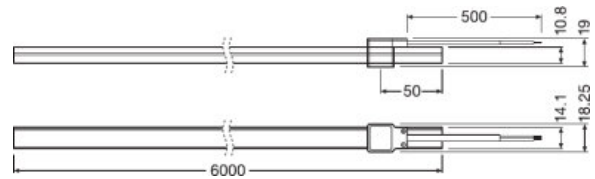

LINEARlight Flex Diffuse 400 and 800 TOP

Application advice

For more detailed application information and graphics please see product datasheet.

Product family datasheet

Additional product information




















- Some LED modules are equipped with a self-adhesive tape for attaching the LED module to suitable materials, such as aluminum profiles, which must be clean and free of oil or silicone coatings, as well as other dirt/dust particles. The adhesive tape is intended for single use and if removed may damage the material to which it is stuck and the LED module itself, which must then be scrapped. Use the adhesive tape when the installation material temperature is in the 18 °C...35 °C range. Complete adhesion takes up to 72 h.
- LED modules are designed for static installations in accordance with IPC 6013C – Use A. Take material vibrations, repetitive torsion, and elongation/compression into account.
- If the operating environment covers a broad temperature range (e.g. outdoor applications) and the operating length is longer than 2 m, the use of adequate mounting surfaces is required. The use of an additional thicker adhesive tape between LED module and mounting surface is also recommended in order to absorb the stress of any mismatch in expansion. Assure enough space for module expansion with increasing temperature.
- The manufacturer is not responsible for damage due to chemical corrosion. The user must provide suitable protection against corrosive agents such as moisture and condensation and any other harmful elements/compounds. Make certain to avoid corrosive atmospheres. According to the current state of LED technology, hydrogen sulfide (H₂S) causes accelerated corrosion which leads to shortened lifetime or premature failure. Sources of H₂S may be rubber, foam rubber, soft-foam tapes, rubber-based sealing, natural sources (e.g. sulfur springs), etc. To avoid H₂S from sulfur-vulcanized rubber use silicon-based materials or peroxide-crosslinked rubber instead. Follow the recommendations in the material datasheet of the rubber supplier.
- IP00 LED modules, as manufactured, have no conformal coating and therefore offer no inherent protection against corrosion. Conformal coating treatment is possible, however materials must be selected properly in order to avoid product damage or impaired performance; the user must also completely seal the cut parts (ends/edges).
- For applications involving exposure to humidity and dust the module must be protected by a fixture or housing with a suitable IP protection class.
- Consult OSRAM Technical Service for further advice.
- Only a qualified electrician may install the module.
- Handle with care and ensure that there is no mechanical product damage, including damage to invisible internal electronics parts.
- Exceeding maximum operating and storage temperature ratings can reduce the expected lifetime or even destroy the LED module. The temperature of the LED module must be measured at the T_c-point in accordance with EN 60598-1 under steady-state conditions, considering the worst case; drive all channels at 100 % power. Refer to the product drawing for the exact location of the T_c-point.
- Exceeding the maximum ratings for the operating voltage causes hazardous overload and will likely destroy the LED module.
- Installation of LED modules and connection to the power supply must comply with all applicable electrical and safety standards.
- Observe correct polarity and wiring diagrams! Incorrect polarity or wrong wiring can cause unpredictable permanent damage or even failure of the product.
- Never exceed the maximum operable length, including daisy-chaining connections.
- Always ensure electrical isolation between the LED module and the mounting surface, especially in the vicinity of connections or cut ends.
- IP00 LED modules are ESD-sensitive; take adequate precautions during installation and operation of the products.
- Use only SELV LED drivers in accordance with applicable lighting standards and LED module ratings. In order to safely operate OSRAM LED modules it is necessary to supply them with an electronically stabilized power supply providing protection against short circuits, overload and overheating. To simplify the approval process of the luminaire/installation, the electronic power supplies control gear for LED modules must bear the CE and ENEC marking. In Europe the Declarations of Conformity must include at least the following standards: EN 61347-2-13, EN 55015, EN 61547 and EN 61000-3-2. ENEC certification will be based on EN 61347-2-13 and EN 62384. OSRAM OPTOTRONIC LED drivers comply with all relevant standards and guarantee safe operation; see the relevant brochure for more detailed information about OSRAM OPTOTRONIC.
- Avoid installations in rural and urban areas with high industrial activity and heavy traffic (higher than class than 4C1 according IEC 60721-3) and as well as installation in spa, areas with chlorine atmosphere, direct exposure to blown sand.

Sales and Technical Support







Product family datasheet

Sales and Technical Support www.osram.com





Download Data

File	
	User instruction LINEARlight FLEX DIFFUSE
	Product Datasheet LINEARlight FLEX DIFFUSE Top_G2_Specification Sheet (EN)
	Brochures App Guide LINEARlight Flex Diffuse (EN)
	Certificates LF ENEC 0040052516 241022.
	Certificates LINEARlight Flex DP UL 4413809 200622
	Eulumdat LFD400T-G2-824-10-ldt
	IES data LFD400T-G2-824-10-IES
	Eulumdat LFD400T-G2-827-10-ldt
	IES data LFD400T-G2-827-10-IES
	Eulumdat LFD400T-G2-830-10-ldt
	IES data LFD400T-G2-830-10-IES
	Eulumdat LFD400T-G2-840-10-ldt
	IES data LFD400T-G2-840-10-IES
	Eulumdat LFD400T-G2-924-10-ldt
	IES data LFD400T-G2-924-10-IES
	Eulumdat LFD400T-G2-927-10-ldt
	IES data LFD400T-G2-927-10-IES
	Eulumdat LFD400T-G2-930-10-ldt
	IES data LFD400T-G2-930-10-IES

Product family datasheet

	Eulumdat LFD400T-G2-940-10-ldt
	IES data LFD400T-G2-940-10-IES
	Eulumdat LFD800T-G2-824-10-ldt
	IES data LFD800T-G2-824-10-IES
	Eulumdat LFD800T-G2-827-10-ldt
	IES data LFD800T-G2-827-10-IES
	Eulumdat LFD800T-G2-830-10-ldt
	IES data LFD800T-G2-830-10-IES
	Eulumdat LFD800T-G2-840-10-ldt
	IES data LFD800T-G2-840-10-IES
	Eulumdat LFD800T-G2-924-10-ldt
	IES data LFD800T-G2-924-10-IES
	Eulumdat LFD800T-G2-927-10-ldt
	IES data LFD800T-G2-927-10-IES
	Eulumdat LFD800T-G2-930-10-ldt
	IES data LFD800T-G2-930-10-IES
	Eulumdat LFD800T-G2-940-10-ldt
	IES data LFD800T-G2-940-10-IES.
	Eulumdat LFD1300T-G2-824-10-ldt
	IES data LFD1300T-G2-824-10-IES
	Eulumdat LFD1300T-G2-827-10-ldt
	IES data LFD1300T-G2-827-10-IES
	Eulumdat LFD1300T-G2-830-10-ldt



Product family datasheet

	IES data LFD1300T-G2-830-10-IES
	Eulumdat LFD1300T-G2-840-10-ldt
	IES data LFD1300T-G2-840-10-IES
	Eulumdat LFD1300T-G2-927-10-ldt
	IES data LFD1300T-G2-927-10-IES
	Eulumdat LFD1300T-G2-930-10-ldt
	IES data LFD1300T-G2-930-10-IES
	Eulumdat LFD1300T-G2-940-10-ldt
	IES data LFD1300T-G2-940-10-IES
	User instruction LINEARlight FLEX DIFFUSE
	Product Datasheet LINEARlight FLEX DIFFUSE Top Specification Sheet (EN)
	Certificates VDE-ENEC Certificate
	Certificates CB TEST CERTIFICATE DE-57743
	Declarations of conformity Flex Diffuse CE 3557934 221121
	Declarations of conformity 726048_Manufacturer Declaration_LINEARlight Flex Diffuse
	Eulumdat Eulumdat LFD400T-G1-824-06
	IES data IES data LFD400T-G1-824-06
	Eulumdat Eulumdat LFD400T-G1-827-06
	IES data IES data LFD400T-G1-827-06
	Eulumdat Eulumdat LFD400T-G1-830-06
	IES data IES data LFD400T-G1-830-06
	User instruction LINEARlight FLEX DIFFUSE
	Eulumdat Eulumdat LFD400T-G1-835-06

Product family datasheet

	IES data IES data LFD400T-G1-835-06
	Eulumdat Eulumdat LFD400T-G1-840-06
	IES data IES data LFD400T-G1-840-06
	Eulumdat Eulumdat LFD400T-G1-865-06
	IES data IES data LFD400T-G1-865-06
	Certificates EAC Certificate
	Certificates CB TEST CERTIFICATE DE-59261
	Declarations of conformity Declaration of conformity LFD600S and LFD800T
	Declarations of conformity Manufacturer declaration LFD600S and LFD800T
	Eulumdat Eulumdat LFD800T-G1-824-06
	IES data IES data LFD800T-G1-824-06
	Eulumdat Eulumdat LFD800T-G1-827-06
	IES data IES data LFD800T-G1-827-06
	Eulumdat Eulumdat LFD800T-G1-830-06
	IES data IES data LFD800T-G1-830-06
	Eulumdat Eulumdat LFD800T-G1-835-06
	IES data IES data LFD800T-G1-835-06
	Eulumdat Eulumdat LFD800T-G1-840-06
	IES data IES data LFD800T-G1-840-06
	Eulumdat Eulumdat LFD800T-G1-865-06
	IES data IES data LFD800T-G1-865-06
	Eulumdat Eulumdat LFD400T-G1-924-06
	IES data IES data LFD400T-G1-924-06

Product family datasheet

	Eulumdat Eulumdat LFD400T-G1-930-06
	IES data IES data LFD400T-G1-930-06
	Eulumdat Eulumdat LFD400T-G1-935-06
	IES data IES data LFD400T-G1-935-06
	Eulumdat Eulumdat LFD400T-G1-940-06
	IES data IES data LFD400T-G1-940-06
	Eulumdat Eulumdat LFD400T-G1-965-06
	IES data IES data LFD400T-G1-965-06
	Eulumdat Eulumdat LFD800T-G1-924-06
	IES data IES data LFD800T-G1-924-06
	Eulumdat Eulumdat LFD800T-G1-930-06
	IES data IES data LFD800T-G1-930-06
	Eulumdat Eulumdat LFD800T-G1-935-06
	IES data IES data LFD800T-G1-935-06
	Eulumdat Eulumdat LFD800T-G1-940-06
	IES data IES data LFD800T-G1-940-06
	Eulumdat Eulumdat LFD800T-G1-965-06
	IES data IES data LFD800T-G1-965-06

Product family datasheet

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172273756	LFD400T -G2-824-10	Shipping carton box 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172273770	LFD400T -G2-827-10	Shipping carton box 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172273794	LFD400T -G2-830-10	Shipping carton box 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172273831	LFD400T -G2-840-10	Shipping carton box 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172273879	LFD400T -G2-924-10	Shipping carton box 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172273893	LFD400T -G2-927-10	Shipping carton box 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172273916	LFD400T -G2-930-10	Shipping carton box 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172273954	LFD400T -G2-940-10	Shipping carton box 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172270373	LFD800T -G2-824-06	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	11710.00 g
4062172270397	LFD800T -G2-827-06	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	11710.00 g
4062172270410	LFD800T -G2-830-06	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	11710.00 g

Product family datasheet

Logistical Data

4062172270458	LFD800T -G2-840-06	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	11710.00 g
4062172270496	LFD800T -G2-924-06	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	11710.00 g
4062172270519	LFD800T -G2-927-06	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	11710.00 g
4062172270533	LFD800T -G2-930-06	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	11710.00 g
4062172270571	LFD800T -G2-940-06	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	11710.00 g
4062172270854	LFD1300T -G2-824-04	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	9640.00 g
4062172270878	LFD1300T -G2-827-04	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	9640.00 g
4062172270892	LFD1300T -G2-830-04	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	9640.00 g
4062172270939	LFD1300T -G2-840-04	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	9640.00 g
4062172270991	LFD1300T -G2-927-04	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	9640.00 g
4062172271011	LFD1300T -G2-930-04	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	9640.00 g
4062172271059	LFD1300T -G2-940-04	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	9640.00 g
4052899581647	LFD400T G1-824-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4052899581661	LFD400T -G1-827-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4052899581685	LFD400T -G1-830-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172001038	LFD400T -G1-835-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4052899581708	LFD400T -G1-840-06	Shipping carton box 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4062172062350	LFD400T -G1-850-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4052899581722	LFD400T -G1-865-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4052899581883	LFD800T G1-824-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4052899581906	LFD800T -G1-827-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g

Product family datasheet

Logistical Data

4052899582002	LFD800T -G1-830-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172001076	LFD800T -G1-835-06	Shipping carton box 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4052899581920	LFD800T -G1-840-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172062398	LFD800T -G1-850-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4052899581944	LFD800T -G1-865-06	Shipping carton box 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4062172025522	LFD400T -G1-924-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025546	LFD400T -G1-930-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025560	LFD400T -G1-935-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025584	LFD400T -G1-940-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025607	LFD400T -G1-965-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025720	LFD800T -G1-924-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025744	LFD800T -G1-930-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025768	LFD800T -G1-935-06	Shipping carton box 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4062172025782	LFD800T -G1-940-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025805	LFD800T -G1-965-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Accessories Optional

Product description	Accessory name	Accessory code
LFD400T -G2-824-10	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G2-824-10	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G2-824-10	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G2-824-10	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G2-824-10	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039

Product family datasheet

LFD400T -G2-824-10	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G2-824-10	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G2-824-10	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G2-824-10	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G2-824-10	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G2-827-10	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G2-827-10	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G2-827-10	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G2-827-10	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G2-827-10	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G2-827-10	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G2-827-10	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G2-827-10	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G2-827-10	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G2-827-10	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G2-830-10	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G2-830-10	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G2-830-10	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G2-830-10	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G2-830-10	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G2-830-10	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G2-830-10	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G2-830-10	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G2-830-10	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G2-830-10	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G2-840-10	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G2-840-10	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G2-840-10	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G2-840-10	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G2-840-10	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G2-840-10	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G2-840-10	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G2-840-10	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G2-840-10	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G2-840-10	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G2-924-10	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G2-924-10	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G2-924-10	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971

Product family datasheet

LFD400T -G2-924-10	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G2-924-10	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G2-924-10	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G2-924-10	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G2-924-10	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G2-924-10	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G2-924-10	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G2-927-10	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G2-927-10	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G2-927-10	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G2-927-10	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G2-927-10	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G2-927-10	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G2-927-10	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G2-927-10	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G2-927-10	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G2-927-10	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G2-930-10	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G2-930-10	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G2-930-10	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G2-930-10	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G2-930-10	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G2-930-10	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G2-930-10	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G2-930-10	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G2-930-10	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G2-930-10	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G2-940-10	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G2-940-10	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G2-940-10	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G2-940-10	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G2-940-10	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G2-940-10	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G2-940-10	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G2-940-10	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G2-940-10	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G2-940-10	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G2-824-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480

Product family datasheet

LFD800T -G2-824-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G2-824-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G2-824-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G2-824-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G2-824-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G2-824-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G2-824-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G2-824-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G2-824-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G2-827-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G2-827-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G2-827-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G2-827-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G2-827-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G2-827-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G2-827-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G2-827-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G2-827-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G2-827-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G2-830-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G2-830-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G2-830-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G2-830-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G2-830-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G2-830-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G2-830-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G2-830-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G2-830-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G2-830-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G2-840-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G2-840-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G2-840-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G2-840-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G2-840-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G2-840-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G2-840-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G2-840-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G2-840-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949

Product family datasheet

LFD800T -G2-840-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G2-924-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G2-924-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G2-924-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G2-924-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G2-924-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G2-924-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G2-924-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G2-924-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G2-924-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G2-924-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G2-927-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G2-927-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G2-927-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G2-927-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G2-927-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G2-927-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G2-927-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G2-927-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G2-927-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G2-927-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G2-930-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G2-930-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G2-930-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G2-930-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G2-930-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G2-930-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G2-930-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G2-930-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G2-930-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G2-930-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G2-940-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G2-940-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G2-940-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G2-940-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G2-940-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G2-940-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G2-940-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107

Product family datasheet

LFD800T -G2-940-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G2-940-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G2-940-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD1300T -G2-824-04	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD1300T -G2-824-04	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD1300T -G2-824-04	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD1300T -G2-824-04	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD1300T -G2-824-04	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD1300T -G2-824-04	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD1300T -G2-824-04	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD1300T -G2-824-04	FX-DCS -G1-GL-25	▶ 4052899452244
LFD1300T -G2-824-04	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD1300T -G2-824-04	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD1300T -G2-827-04	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD1300T -G2-827-04	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD1300T -G2-827-04	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD1300T -G2-827-04	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD1300T -G2-827-04	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD1300T -G2-827-04	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD1300T -G2-827-04	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD1300T -G2-827-04	FX-DCS -G1-GL-25	▶ 4052899452244
LFD1300T -G2-827-04	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD1300T -G2-827-04	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD1300T -G2-830-04	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD1300T -G2-830-04	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD1300T -G2-830-04	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD1300T -G2-830-04	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD1300T -G2-830-04	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD1300T -G2-830-04	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD1300T -G2-830-04	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD1300T -G2-830-04	FX-DCS -G1-GL-25	▶ 4052899452244
LFD1300T -G2-830-04	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD1300T -G2-830-04	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD1300T -G2-840-04	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD1300T -G2-840-04	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD1300T -G2-840-04	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD1300T -G2-840-04	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD1300T -G2-840-04	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039

Product family datasheet

LFD1300T -G2-840-04	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD1300T -G2-840-04	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD1300T -G2-840-04	FX-DCS -G1-GL-25	▶ 4052899452244
LFD1300T -G2-840-04	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD1300T -G2-840-04	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD1300T -G2-927-04	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD1300T -G2-927-04	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD1300T -G2-927-04	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD1300T -G2-927-04	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD1300T -G2-927-04	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD1300T -G2-927-04	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD1300T -G2-927-04	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD1300T -G2-927-04	FX-DCS -G1-GL-25	▶ 4052899452244
LFD1300T -G2-927-04	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD1300T -G2-927-04	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD1300T -G2-930-04	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD1300T -G2-930-04	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD1300T -G2-930-04	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD1300T -G2-930-04	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD1300T -G2-930-04	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD1300T -G2-930-04	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD1300T -G2-930-04	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD1300T -G2-930-04	FX-DCS -G1-GL-25	▶ 4052899452244
LFD1300T -G2-930-04	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD1300T -G2-930-04	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD1300T -G2-940-04	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD1300T -G2-940-04	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD1300T -G2-940-04	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD1300T -G2-940-04	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD1300T -G2-940-04	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD1300T -G2-940-04	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD1300T -G2-940-04	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD1300T -G2-940-04	FX-DCS -G1-GL-25	▶ 4052899452244
LFD1300T -G2-940-04	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD1300T -G2-940-04	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T G1-824-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T G1-824-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T G1-824-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971

Product family datasheet

LFD400T G1-824-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T G1-824-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T G1-824-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T G1-824-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T G1-824-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T G1-824-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T G1-824-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G1-827-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G1-827-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G1-827-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G1-827-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G1-827-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G1-827-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G1-827-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G1-827-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G1-827-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G1-827-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G1-830-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G1-830-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G1-830-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G1-830-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G1-830-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G1-830-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G1-830-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G1-830-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G1-830-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G1-830-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G1-835-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G1-835-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G1-835-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G1-835-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G1-835-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G1-835-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G1-835-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G1-835-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G1-835-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G1-835-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G1-840-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480

Product family datasheet

LFD400T -G1-840-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G1-840-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G1-840-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G1-840-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G1-840-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G1-840-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G1-840-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G1-840-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G1-840-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G1-850-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G1-850-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G1-850-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G1-850-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G1-850-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G1-850-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G1-850-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G1-850-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G1-850-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G1-850-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G1-865-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G1-865-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G1-865-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G1-865-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G1-865-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G1-865-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G1-865-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G1-865-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G1-865-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G1-865-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T G1-824-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T G1-824-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T G1-824-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T G1-824-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T G1-824-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T G1-824-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T G1-824-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T G1-824-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T G1-824-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949

Product family datasheet

LFD800T -G1-824-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G1-827-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G1-827-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G1-827-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G1-827-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G1-827-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G1-827-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G1-827-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G1-827-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G1-827-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G1-827-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G1-830-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G1-830-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G1-830-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G1-830-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G1-830-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G1-830-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G1-830-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G1-830-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G1-830-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G1-830-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G1-835-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G1-835-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G1-835-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G1-835-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G1-835-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G1-835-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G1-835-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G1-835-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G1-835-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G1-835-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G1-840-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G1-840-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G1-840-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G1-840-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G1-840-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G1-840-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G1-840-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107

Product family datasheet

LFD800T -G1-840-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G1-840-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G1-840-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G1-850-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G1-850-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G1-850-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G1-850-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G1-850-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G1-850-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G1-850-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G1-850-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G1-850-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G1-850-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G1-865-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G1-865-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G1-865-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G1-865-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G1-865-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G1-865-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G1-865-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G1-865-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G1-865-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G1-865-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G1-924-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G1-924-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G1-924-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G1-924-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G1-924-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G1-924-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G1-924-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G1-924-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G1-924-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G1-924-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G1-930-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G1-930-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G1-930-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G1-930-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G1-930-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039

Product family datasheet

LFD400T -G1-930-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G1-930-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G1-930-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G1-930-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G1-930-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G1-935-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G1-935-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G1-935-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G1-935-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G1-935-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G1-935-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G1-935-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G1-935-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G1-935-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G1-935-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G1-940-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G1-940-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G1-940-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G1-940-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G1-940-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G1-940-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G1-940-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G1-940-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G1-940-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G1-940-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD400T -G1-965-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400T -G1-965-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400T -G1-965-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400T -G1-965-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400T -G1-965-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400T -G1-965-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400T -G1-965-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400T -G1-965-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400T -G1-965-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD400T -G1-965-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G1-924-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G1-924-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G1-924-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971

Product family datasheet

LFD800T -G1-924-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G1-924-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G1-924-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G1-924-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G1-924-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G1-924-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G1-924-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G1-930-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G1-930-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G1-930-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G1-930-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G1-930-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G1-930-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G1-930-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G1-930-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G1-930-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G1-930-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G1-935-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G1-935-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G1-935-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G1-935-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G1-935-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G1-935-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G1-935-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G1-935-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G1-935-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G1-935-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G1-940-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD800T -G1-940-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G1-940-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G1-940-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G1-940-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G1-940-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G1-940-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G1-940-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G1-940-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G1-940-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963
LFD800T -G1-965-06	FX-LFDM -G1-BT-17H11	▶ 4052899452480

Product family datasheet

LFD800T -G1-965-06	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD800T -G1-965-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD800T -G1-965-06	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD800T -G1-965-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD800T -G1-965-06	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD800T -G1-965-06	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD800T -G1-965-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD800T -G1-965-06	FX-LFDM -G1-TT-16H16-200	▶ 4052899544949
LFD800T -G1-965-06	FX-LFDM -G1-TTL-16H11W10-200	▶ 4052899544963

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.