

DALIECO BT CONTROL

DALieco BT CONTROL | Control units for light management systems



Areas of application

- Offices
- Meeting rooms
- Corridors

Product family benefits

- Intuitive manual dimming, switching and changing of colour temperature
- Simplified startup thanks to predefined operation modes
- Firmware update over-the-air via Bluetooth possible

Product family features

- Light control with app connection via Bluetooth
- One DALI broadcast output channel
- Daylight-dependent regulation and presence-dependent control of light
- Connection of up to 4 OSRAM DALI sensors
- Operation via standard pushbutton
- Outputs with electronical reversible overtemperature, short-circuit, overload protection
- Adjustment of all settings via smartphone


Product datasheet

Technical data

Electrical data

Nominal voltage	230 V
Mains frequency	50/60 Hz

Dimensions & weight

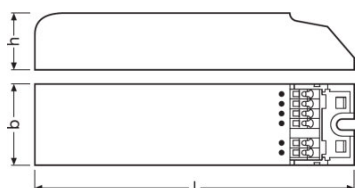

Length	108.0 mm
Width	30.0 mm
Height	21.0 mm
Product weight	45.00 g

Temperatures & operating conditions

Ambient temperature range	-20...+60 °C
---------------------------	--------------

Capabilities

Dimming interface	DALI
Number of control outputs	1
Transmitter range	15 m
Type of installation	Luminaire integration/Independent mounting

Certificates & standards

Type of protection	IP20
--------------------	------

Logistical data

Commodity code	853710989900
----------------	--------------




Equipment / Accessories

- Suitable for up to 32 electronic control gears

Product datasheet

- Free App for iOS and Android available at the app store
- Ceiling or independent installation via ECO CI KIT possible

Download Data

File	
	User instruction DALIeco BT control Operating instruction
	User instruction DALIeco BT control Mounting instruction
	Declarations of conformity DALIeco BT Control CE declaration

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899988781	DALIECO BT CONTROL	Shipping carton box 25	223 mm x 197 mm x 179 mm	7.86 dm ³	1787.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.