

ELEMENT Non SELV

Linear / Area Constant Current – Non dimmable



Areas of application

- Linear lighting for office, school and public areas
- Suitable for luminaires of protection class I

Product family benefits

- Flexible current setting (DIPswitch – 4 currents)
- Small housing for flexible luminaire designs
- High efficiency (up to 94%)
- Enhanced safety due to overload, overtemperature, short-circuit protection

Product family features

- Line frequency: 50 Hz | 60 Hz
- Supply voltage: 220...240 V
- Lifetime: up to 50,000 h (temperature at T_c max. = -10 °C, max 10% failure rate)
- Non-isolated drivers

Product family datasheet

Technical data

Electrical data

Product description	Efficiency in full-load	Maximum output power
ELEMENT 18/220...240/350 D CS L	88 % ¹⁾	18 W
ELEMENT 40/220...240/350 D CS L		42 W
ELEMENT 60/220...240/350 D CS L	94 % ¹⁾	60 W

¹⁾ at 230 V, 50 Hz

Dimensions & weight


Product description	Mounting hole spacing, length	Product weight	Cable cross-section, input side	Cable cross-section, output side	Wire preparation length, input side
ELEMENT 18/220...240/350 D CS L	200.0 mm	102.00 g	0.5...1.5 / 0.75...1.5 mm ² ¹⁾	0.5...1.5 / 0.75...1.5 mm ² ¹⁾	8.5...9.5 mm
ELEMENT 40/220...240/350 D CS L	200.0 mm	126.00 g	0.5...1.5 / 0.75...1.5 mm ² ¹⁾	0.5...1.5 / 0.75...1.5 mm ² ¹⁾	8.5...9.5 mm
ELEMENT 60/220...240/350 D CS L	200.0 mm	138.00 g	0.5...1.5 / 0.75...1.5 mm ² ¹⁾	0.5...1.5 / 0.75...1.5 mm ² ¹⁾	8.5...9.5 mm

Product description	Length	Width	Height
ELEMENT 18/220...240/350 D CS L	210.0 mm	30.0 mm	21.0 mm
ELEMENT 40/220...240/350 D CS L	210.0 mm	30.0 mm	21.0 mm
ELEMENT 60/220...240/350 D CS L	210.0 mm	30.0 mm	21.0 mm


¹⁾ Solid or flexible leads

Product family datasheet


Product line drawing

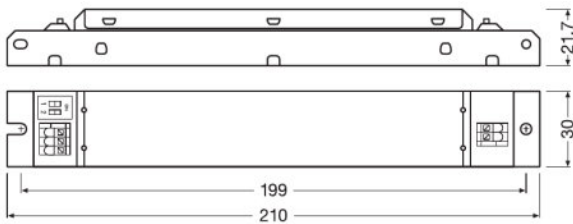

ELEMENT 18/220...240/350 D CS L

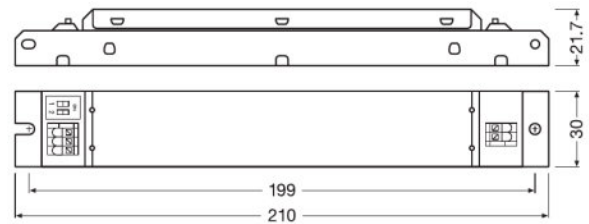

ELEMENT 40/220...240/350 D CS L

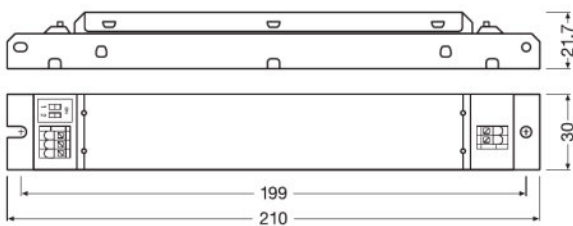

ELEMENT 60/220...240/350 D CS L

Product family datasheet

Temperatures & operating conditions

Product description	Ambient temperature range	Maximum temperature at tc test point	Max.housing temperature in case of fault	Temperature range at storage
ELEMENT 18/220...240/350 D CS L	-20...+50 °C	75 °C	110 °C	-25...85 °C
ELEMENT 40/220...240/350 D CS L	-20...+50 °C	75 °C	110 °C	-25...85 °C
ELEMENT 60/220...240/350 D CS L	-20...+50 °C	75 °C	110 °C	-25...85 °C

Product description	Permitted rel. humidity during operation
ELEMENT 18/220...240/350 D CS L	5...85 % ¹⁾
ELEMENT 40/220...240/350 D CS L	5...85 % ¹⁾
ELEMENT 60/220...240/350 D CS L	5...85 % ¹⁾

¹⁾ Non-condensing

Lifespan

Product description	ECG lifetime
ELEMENT 18/220...240/350 D CS L	35000 / 50000 h ¹⁾
ELEMENT 40/220...240/350 D CS L	35000 / 50000 h ¹⁾
ELEMENT 60/220...240/350 D CS L	35000 / 50000 h ¹⁾

¹⁾ At maximum $T_c = 75^\circ\text{C}$ / 10% failure rate / At $T_c = 65^\circ\text{C}$ / 10% failure rate

Expected Lifetime

Product name				
ELEMENT 18/220...240/350 D CS L	ECG ambient temperature [ta]	-	-	-
	Temperature at tc-point [°C]	75	-	-
	Lifetime [h]	-	-	-
ELEMENT 40/220...240/350 D CS L	ECG ambient temperature [ta]	-	-	-
	Temperature at tc-point [°C]	75	-	-
	Lifetime [h]	-	-	-
ELEMENT 60/220...240/350 D CS L	ECG ambient temperature [ta]	-	-	-
	Temperature at tc-point [°C]	75	-	-
	Lifetime [h]	-	-	-

Product family datasheet

Capabilities

Product description	Intended for no-load operation
ELEMENT 18/220...240/350 D CS L	No
ELEMENT 40/220...240/350 D CS L	
ELEMENT 60/220...240/350 D CS L	No

Programming

Product description	Programming device
ELEMENT 18/220...240/350 D CS L	DIPswitch
ELEMENT 40/220...240/350 D CS L	DIPswitch
ELEMENT 60/220...240/350 D CS L	DIPswitch

Certificates & standards

Product description	Approval marks – approval	Standards	Type of protection
ELEMENT 18/220...240/350 D CS L	CE / ENEC 05 / EAC / CCC / BIS / RCM	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 61547	IP20
ELEMENT 40/220...240/350 D CS L	CE / ENEC 05 / EAC / CCC / BIS / RCM	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 61547	IP20
ELEMENT 60/220...240/350 D CS L	CE / ENEC 05 / EAC / CCC / BIS / RCM	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 61547	IP20

Logistical data

Product description	Commodity code
ELEMENT 18/220...240/350 D CS L	850440829000
ELEMENT 40/220...240/350 D CS L	850440829000
ELEMENT 60/220...240/350 D CS L	850440829000

Product family datasheet






Application advice

For more detailed application information and graphics please see product datasheet.

Sales and Technical Support

Sales and Technical Support www.osram.com

Download Data

File	
	User instruction ELEMENT LED Power Supply
	Certificates CCC Certificate 2018171002002190
	Certificates ENEC certificate
	Declarations of conformity ELEMENT D CS L CE 3650284 190821
	Certificates CCC certification 40W60W

Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899553071	ELEMENT 18/220...240/350 D CS L	Shipping carton box 20	228 mm x 138 mm x 160 mm	5.03 dm ³	2318.00 g
4052899553095	ELEMENT 40/220...240/350 D CS L	Shipping carton box 20	228 mm x 138 mm x 160 mm	5.03 dm ³	2798.00 g

Product family datasheet

Logistical Data

4052899553118	ELEMENT 60/220...240/350 D CS L	Shipping carton box 20	228 mm x 138 mm x 160 mm	5.03 dm ³	3038.00 g
---------------	------------------------------------	---------------------------	--------------------------	----------------------	-----------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.